

DD1.25 PALLET INVERTER

The DD1.25 is a versatile unit specifically designed to handle loads in the lower weight range. (If you have heavier loads, then please look at our FS or FS DC data sheets).

The table size determines that it is not suited to pallets over 1.2m wide or with overhung product. We would not normally build the DD1.25 with modified table dimensions or jaw opening.

Ideal for handling finished goods (for example dairy products, pharmaceuticals, consumer goods and stacks of paper).




USES INCLUDE



- Load transfer from wood to plastic or other hygienic pallet
- Switching outgoing loads to shipping or expendable skids
- Transferring incoming goods to high quality in-house pallets

KEY FEATURES


- Lightweight (1500kg) – easy to transport
- Twin chain-linked clamping tables opening to within 110mm off floor level
- Can be loaded by forklift truck, stacker, or at ground level by pallet truck via a 1.5m long ramp
- Compact size. Perfect for working in confined areas or difficult to access locations
- Simple push button controls with option of semi or fully automatic controls
- Various guarding options
- Best suited to lightweight (1250kg maximum), low volume applications

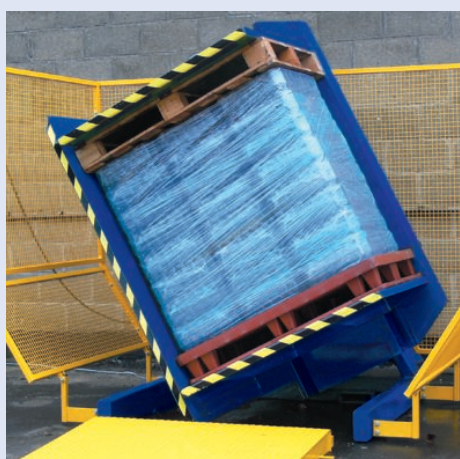

Three methods of loading

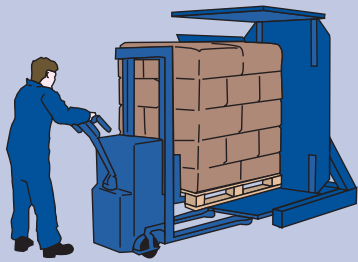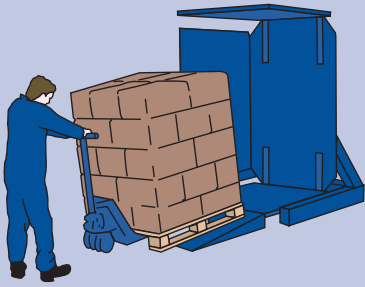

Needs modification
for loading by stacker truck

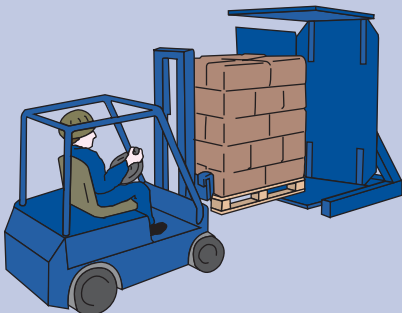

DD1.25 PALLET INVERTER

Specifications

| | |
|--------------------|------------------------|
| Usable Jaw Opening | Max 1.90m Min 0.90m |
|--------------------|------------------------|

| | |
|----------------------|----------------------------|
| Standard Load Tables | Width 1.16m Depth 1.18m |
|----------------------|----------------------------|

Can be supplied with 1.50m long loading ramp for floor level access

| | |
|------------------|----------|
| Loading Capacity | 1250 kgs |
|------------------|----------|

| | |
|--------------|------------------|
| Power Supply | 3ph / 400V / 15A |
|--------------|------------------|

| | |
|------------|-------|
| Motor Size | 2.2kW |
|------------|-------|

| | |
|--------|----------|
| Weight | 1500 kgs |
|--------|----------|

| | |
|------------------|---------|
| Weight of Guards | 175 kgs |
|------------------|---------|


| | |
|----------|--|
| Controls | Extended individual push button controls with semi or fully auto-sequenced systems available as an option |
|----------|--|

| | |
|---|----------------|
| Operating Space (including attached guards) | A Width 2.70m |
| | B Depth 1.78m |
| | C Height 2.30m |

Depth increases to 3.00m when fitted with floor fixed guards and multi photo-beams

| | |
|--|--|
| Standard Shipping Dimensions (with guards fitted) | Width 2.70m Depth 1.78m Height 2.00m |
|--|--|

SIDE ELEVATION

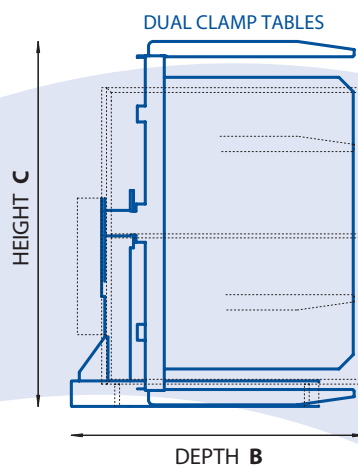

PLAN VIEW

